

PORCHES

PERGOLAS

DOOR CANOPIES

METAL AWNINGS


FABRIC AWNINGS

WALL SYSTEMS


ACCESS RAMPS

MISC

Attached Cover

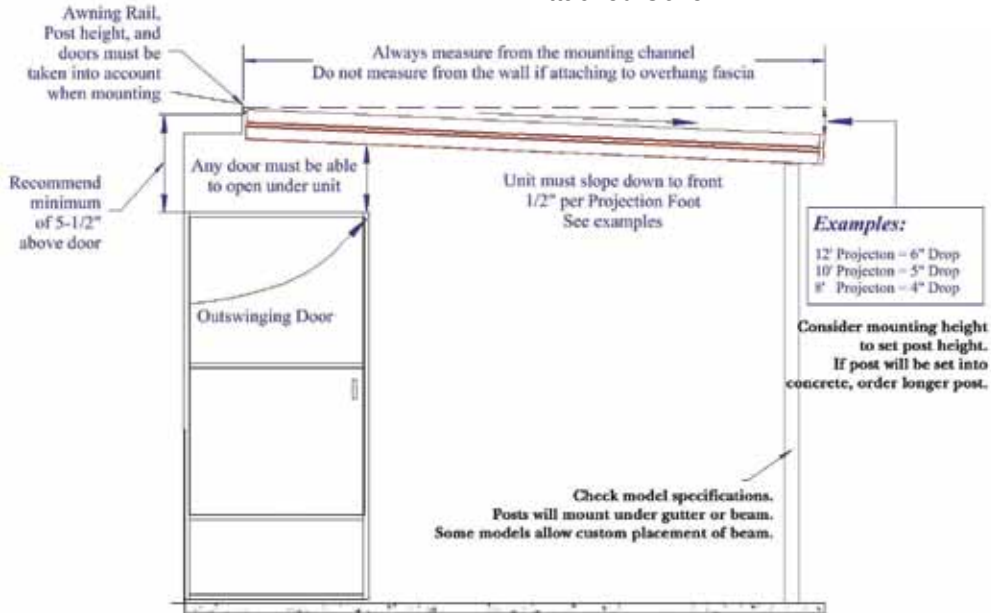

Attached Cover for use as a carport

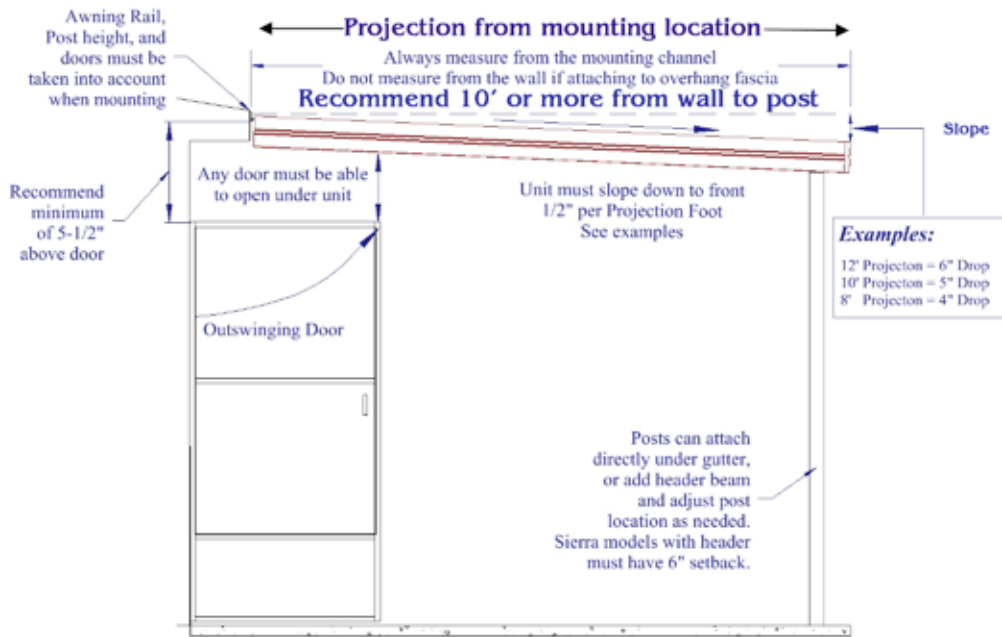

Width of unit - distance along wall

Adding a porch or patio cover? Points to consider:

1. Roof panel choices

Americana offers several roof panels for our covers. Each model lists style included.

- V or W shaped panels are the most economical with a corrugated ceiling.
- 8 in. flat shape panel for a smooth under ceiling
- Insulated panel has a polystyrene core and stucco embossed aluminum skin.
Quiet during a rain and reduces temperatures up to 15% on hot days
Eliminates gaps between gutter, beam and roof panel.

2. Post placement. Check model, posts will mount under front gutter or support beam.

- Sierra model:
4 in. tall beam mounts to pre-punched roof panels, creating a 6 in. overhang.
Optional punching of roof panels for custom beam set back is available additional charge.
- Teton and Vegas model:
Standard model: no beam
Optional beam choices include: 8 in. tall x 3" wide beam, 3 in. square beam
Posts mount under beam. Place beam 6 in. to 24 in. from front.
- Yukon model:
Beam choices include: 8 in. tall x 3" wide beam, 3 in. square beam
Posts mount under beam. Place beam 6 in. to 24 in. from front.
- Ozark model:
Standard model: no beam
Optional 4 in. beam mounts to pre-punched roof panels, creating a 6 in. overhang.
- Alpine model:
Standard model: no beam
Optional beam choices include: 8 in. tall x 3" wide beam, 3 in. square beam
Posts mount under beam. Place beam 6 in. to 24 in. from front.
- Cascade model:
Standard model: no beam
Optional beam choices include: 8 in. tall x 3" wide beam, 3 in. square beam
Posts mount under beam. Place beam 6 in. to 24 in. from front.

3. Wall mounting area

Example of mounting height using 8' tall post on a 10' projection cover:

$$96 \text{ in. (8')} + 5 \text{ in. (1/2 in. per foot of projection)} = 101 \text{ in. mounting height}$$

Make sure wall is free of obstructions at this dimension.

Post may be shortened on job site, changing mounting height if needed.

4. Posts can be surface mounted or bury 2' in concrete. Order longer post if placing in concrete.

5. Post type will be indicated in the kit information with options listed.

Aluminum surfaces warranted against peeling, cracking or crazing for 5 years under normal usage plus 90-day warranty against defects in material and workmanship on all products.

PORCHES

PERGOLAS

DOOR
CANOPIES

METAL
AWNINGS

FABRIC
AWNINGS

WALL
SYSTEMS

ACCESS
RAMPS

MISC