

Aluma Vent Awning Order Form



Date:
PO#

Ordered By

Lowe's Store #:
Address:
State/Province:
Zip/Postal Code:
Phone:
Fax:
Contact Name:

Customer

Customer Name:
Address:
State/Province:
Zip/Postal Code:
Phone:

Americana Building Products
#2 Industrial Drive
Salem, Illinois
United States
62881
Phone: 618-548-2800
Fax: 618-548-2890
www.americana.com

ATTN: Millwork Sales Associate

Some models and sizes on lowes.com

Americana vendor # 65144, SOS 139067

Custom Order from M20

Millwork: Awnings

Doors: Aluminum (43" & 50" proj)

Aluma Vent Regular

Aluma Vent Valance

Windows: Aluminum (22", 29", 36" proj)

Aluma Vent Regular

Aluma Vent Valance

Aluma Vent Awning

Width: 35" minimum, 1" increments

Drop/Height of awning
= 1/2 height of window


Projection:

End Style


Awning Body Color:

Optional Stripe Color:

Regular End Style

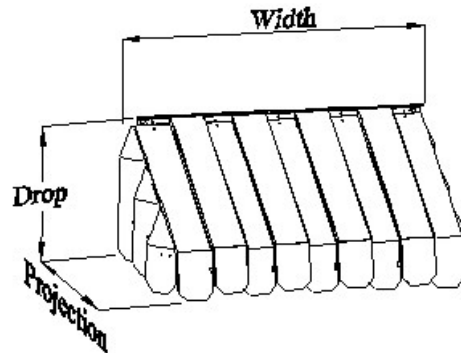

Valance End Style



To maximize shade and protection for window applications:

East or west side of house, awning height should cover 65%-75% of window height.

South side, awning height can be 45%-60% of window height.

Projection: Recommended to be 50% of window height

Width: Recommended to be 12"-24" more than window width in 5" increments.

Regular end style flares out and will be approximately 7" wider than stated width.

For door applications:

Check for available mounting room above door, minimum 2" needed

Check that outswinging door will not interfere with canopy